



SOLID ENGINEERED
FLO & RING

arbor**flor**[®]




high quality flooring solutions

Solid Flooring

Our solid range is machined from 100% European Oak.



- ❶ Lacquered or brushed & oiled surface finish
- ❷ 100% solid wood
- ❸ Stress grooves

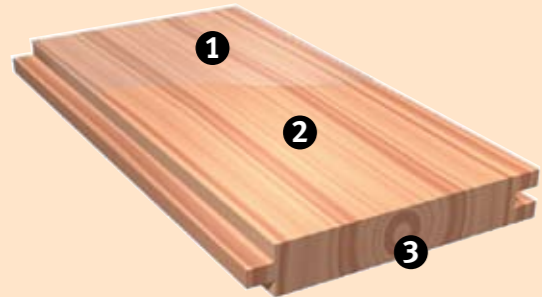

Engineered Flooring

A strong and stable flooring - with the advantage of a real wood surface.

- ❶ Lacquered or oiled surface finish
- ❷ 100% solid wood decorative wear layer
- ❸ Softwood core
- ❹ Click installation system
- ❺ Backing balance board

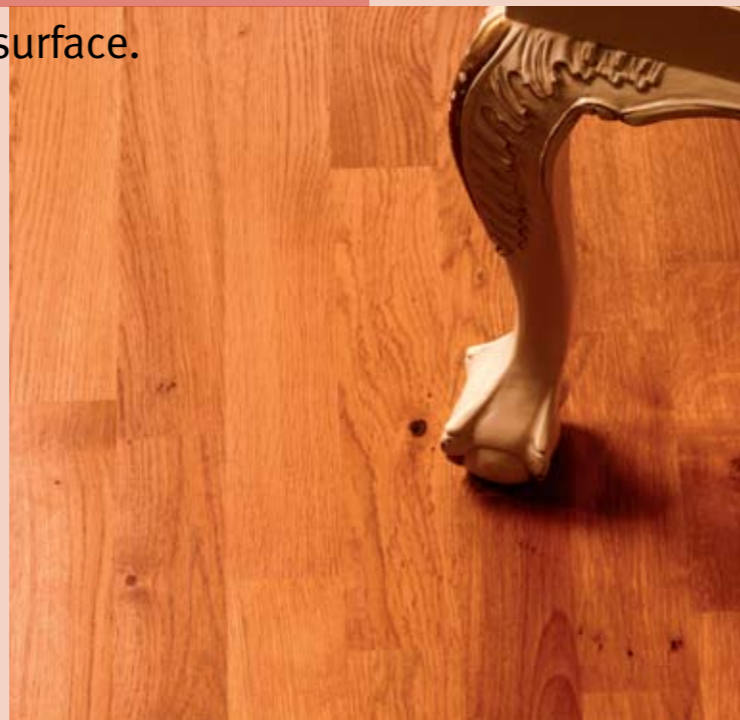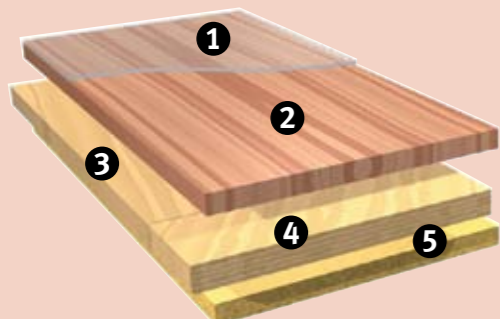

Solid Flooring

Arborflor solid oak flooring is machined from rustic grade European Oak, which is lively & full of character. High quality finishes ensure durability & excellent appearance.



PRODUCT DETAILS

Thickness	18mm
Width	130mm
Length	400 > 1700mm (random)
Coverage	2.184 sq. m per pack






Engineered Flooring

Simple, quick & clean installation without the need for adhesive. This is also suitable for underfloor heating*.

1 Strip Options

PRODUCT DETAILS	
Thickness	14mm
Width	180mm
Length	2200mm
Coverage	2.770 sq. m per pack

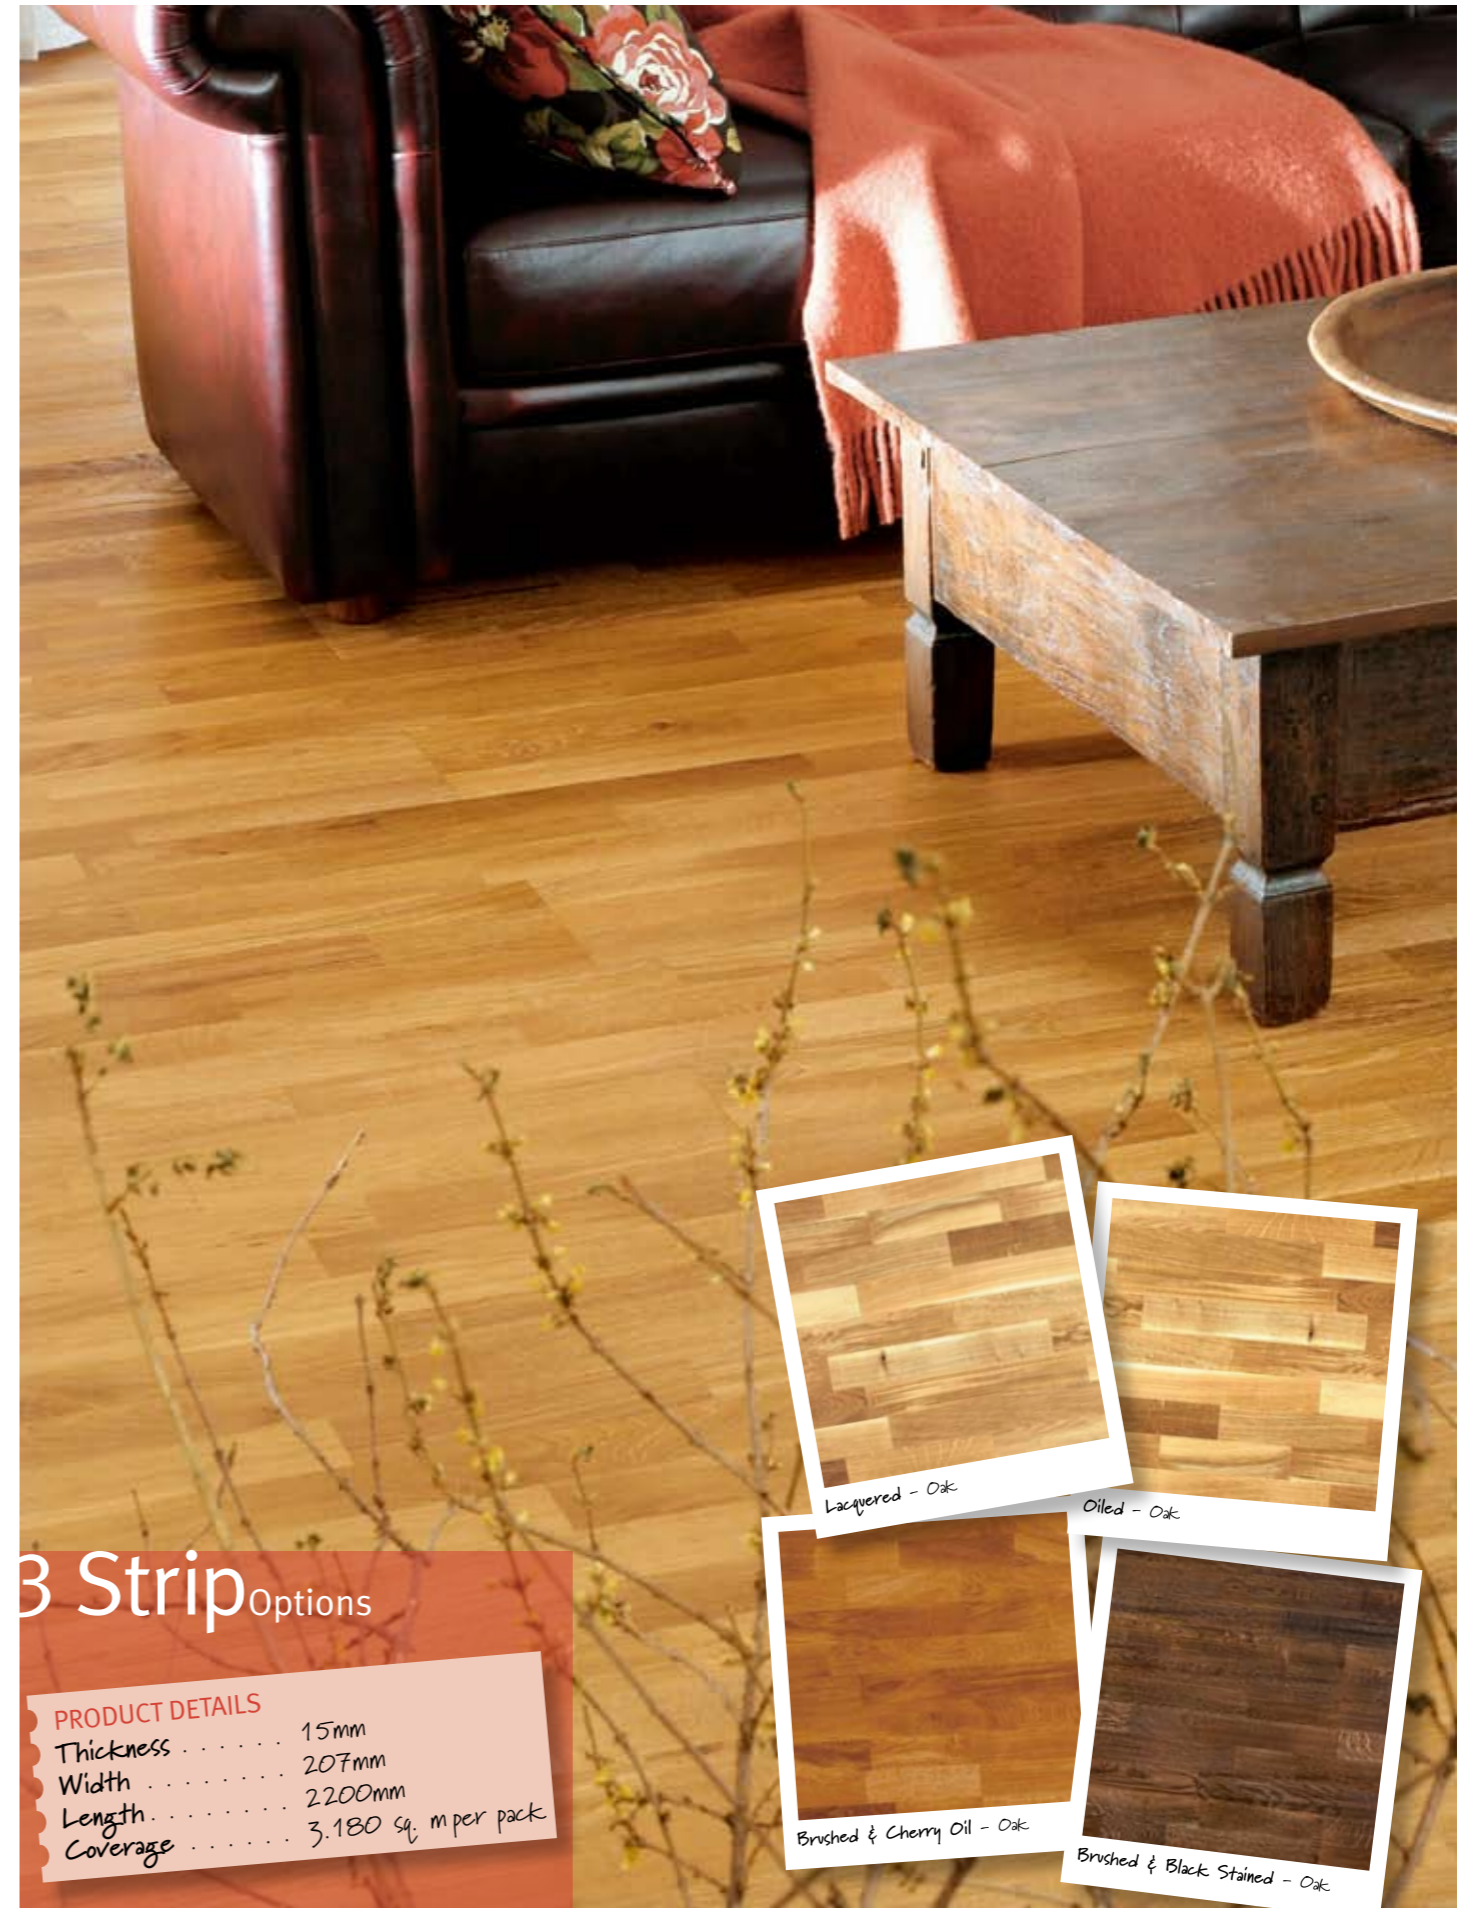

3 Strip Options

PRODUCT DETAILS	
Thickness	15mm
Width	207mm
Length	2200mm
Coverage	3.180 sq. m per pack



* Follow manufacturers guidelines

Solid Oak Trims


Material: Solid Oak
Finishes: Lacquered
Fixing: Galved & Screwed (Each piece comes complete with a pre-drilled PVC base and screws)
Lengths: 990mm or 3000mm



High quality radiator pipes, handy jigsaw design means they are quick and easy to fit, ensuring a tidy finish to your room.


A Ramp profile

This is used for the transition between wooden floors & other floor coverings at a different height (for example wood to carpet/vinyl)

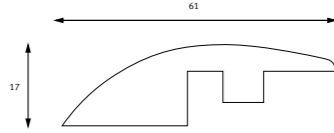


B Twin profile

This provides a neat joint between two floors of the same height (for example wood to wood)

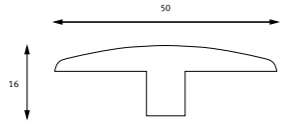


C End profile

This provides a clean finish to the room around fireplaces/patio doors etc.




D Perimeter profile

An alternative profile to use around room edges



E Scotia

A classic profile to cover the required expansion gaps around room edges



Underlay

Elastilon is an adhesive mat for laying solid wood floors. It is a unique system and subfloor in one which pulls the floor segments together almost seamlessly. This installation method solves many problems including shrinkage and swelling, and results in rapid and clean laying.



Solid Oak Architraves

Material: Solid American White Oak
Finishes: Unfinished
Lengths: Random



Torus

Sizes available:
25mm (T)hick x 75mm (W)ide






Ogee

Sizes available:
25mm (T)hick x 75mm (W)ide




Regal

Sizes available:
25mm (T)hick x
75mm/100mm (W)ide

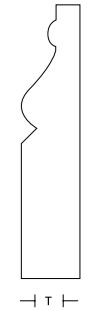

Solid Oak Skirting

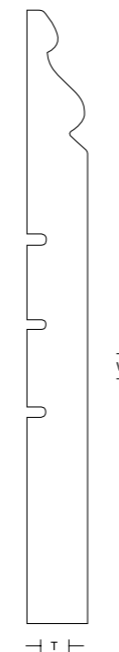

Regal

Sizes available:
25mm (T)hick x 125/175mm (W)ide




Ogee

Torus



Torus & Ogee Dual Purpose

Sizes available:
25mm (T)hick x 125/175mm (W)ide

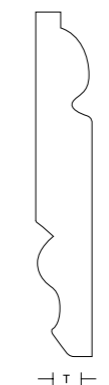

Other trims & accessories available to order, in different profiles, species & finishes.



All our engineered products come with a 25 year structural manufacturers guarantee, and are fully FSC certified (ensuring timber is from legal and sustainable sources).



By buying products with the FSC label you are supporting the growth of responsible forest management worldwide.
The global benchmark for responsible forest management.
©1996 FSC AC

Stockists

To find your nearest Arborflor stockist, please contact.


Arborflor

Barrow Road
New Holland
North Lincolnshire
DN19 7RR

Tel: 01469 535428

e: info@arborflor.co.uk

w: www.arborflor.co.uk



Please note: These images do not reflect the true potential of the flooring, and colour variations will occur.